

MATHICSE Technical Report

Nr. 08.2011

August 2011



On the approximation of stability factors for general parametrized partial differential equations with a two-level affine decomposition

Toni Lassila, Andrea Manzoni and Gianluigi Rozza

<http://mathicse.epfl.ch>

Address:

EPFL - SB - MATHICSE (Bâtiment MA)
Station 8 - CH-1015 - Lausanne - Switzerland

Phone: +41 21 69 32555

Fax: +41 21 69 32545

**ON THE APPROXIMATION OF STABILITY FACTORS
FOR GENERAL PARAMETRIZED PARTIAL DIFFERENTIAL
EQUATIONS WITH A TWO-LEVEL AFFINE DECOMPOSITION**

TONI LASSILA¹, ANDREA MANZONI¹ AND GIANLUIGI ROZZA¹

Abstract. A new approach for computationally efficient estimation of stability factors for parametric partial differential equations is presented. The general parametric bilinear form of the problem is approximated by two affinely parametrized bilinear forms at different levels of accuracy (after an empirical interpolation procedure). The successive constraint method is applied on the coarse level to obtain a lower bound for the stability factors, and this bound is extended to the fine level by adding a proper correction term. Because the approximate problems are affine, an efficient offline/online computational scheme can be developed for the certified solution (error bounds and stability factors) of the parametric equations considered. We experiment with different correction terms suited for a posteriori error estimation of the reduced basis solution of elliptic coercive and noncoercive problems.

2000 Mathematics Subject Classification. 35J05, 65N15, 65N30.

The dates will be set by the publisher.

INTRODUCTION

Stability factors of linear partial-differential operators control the well-posedness of the equations and the magnitude of many a posteriori error estimates for the finite element method [3, 10]. In applications related to optimal design and/or control of PDEs, the state equations usually depend on a vector μ of real parameters – which can describe either physical or geometrical properties – and varying the parameters can cause large qualitative changes, both in terms of solutions and approximation stability. As a motivation, we mention the Helmholtz problem, parametrized with respect to the wave frequency: in this case the problem can become ill-posed at the resonance frequencies [11]. In this paper we consider and refer to the specific area of model reduction of parametric PDEs through reduced basis (RB) methods with certified a posteriori error bounds, where the “truth” finite element solution $u_h(\mu)$ is approximated by a solution $u_h^N(\mu)$ obtained through Galerkin projection in a low-dimensional subspace [30–32, 35]. To certify the reduced solution we need to be able to give a computable a posteriori error estimator of the form

$$\|u_h(\mu) - u_h^N(\mu)\| \leq \frac{\|R(u_h^N(\mu))\|_{X'_h}}{\beta_h(\mu)}$$

Keywords and phrases: parametric model reduction, a posteriori error estimation, stability factors, coercivity constant, inf-sup condition, parametrized PDEs, reduced basis method, successive constraint method, empirical interpolation.

¹ Modelling and Scientific Computing, Mathematics Institute of Computational Science and Engineering, École Polytechnique Fédérale de Lausanne, Station 8, EPFL, CH-1015 Lausanne, Switzerland. toni.lassila@epfl.ch, andrea.manzoni@epfl.ch, gianluigi.rozza@epfl.ch

where $R(u_h^N(\mu))$ is a discrete residual computed in its dual norm and $\beta_h(\mu)$ a stability factor to be bounded from below [35]. A priori there is no guarantee that the reduced problem is stable (i.e. coercive or inf-sup stable in the more general noncoercive case) at a given parameter value μ , and so a computable lower bound $\beta_h^{\text{LB}}(\mu) > 0$ (where it exists) is needed both to certify that there exists in fact a stable solution, as well as to quantify the approximation error to guarantee the accuracy and the reliability of the methodology.

Let X_h be a finite-dimensional subspace $H_0^1(\Omega) \subset X_h \subset H^1(\Omega)$ of the usual Sobolev space with inner product $(v, w)_1 := \int_{\Omega} (\nabla v \cdot \nabla w + vw) d\Omega$ and norm $\|v\|_X := \sqrt{(v, v)_1}$, and $\Omega \subset \mathbb{R}^d$ a bounded polyhedral domain. Our problem of interest is a general (scalar, elliptic) parametric linear partial differential equation, written in the discretized weak form as follows: for given p -dimensional parameter vector $\mu \in \mathcal{P}$, find $u_h(\mu) \in X_h$ s.t.

$$a(u_h(\mu), v_h; \mu) = F(v_h; \mu) \quad \forall v_h \in X_h. \quad (\text{P})$$

The following assumptions are made in order to have a well-posed problem: (i) the parametric bilinear form $a(\cdot, \cdot; \mu)$ is continuous for all μ , and (ii) satisfies an inf-sup condition

$$\exists \beta_0 > 0 : \inf_{v \in X_h} \sup_{w \in X_h} \frac{a(v, w; \mu)}{\|v\|_X \|w\|_X} = \beta_h(\mu) \geq \beta_0,$$

except possibly at finitely many $\mu \in \mathcal{P}$. We call $\beta_h(\mu)$ the (discrete) *parametric stability factor*; (iii) the parametric linear form $F(\cdot; \mu)$ is bounded for all μ ; (iv) the parameter domain $\mathcal{P} \subset \mathbb{R}^P$ is a bounded subset of a low-dimensional parameter space. Assumptions (i-iii) guarantee the existence and uniqueness of solutions. Assumption (iv) limits the parameter domain to one that we can explore via an efficient discrete sampling algorithm¹. The most challenging one of our four assumptions is (ii) because it is usually not possible to derive analytical expressions for the parametric stability factor $\beta_h(\mu)$. Even if theoretical lower bounds can be obtained, they can be very pessimistic and not useful for practical computational applications, such as a posteriori error estimation. Therefore our interest is in providing numerical methods for obtaining efficient lower bounds for $\beta_h(\mu)$. Some algorithms for deriving lower bounds for parametric stability factors have been proposed in literature, among them we mention the Successive Constraint Method (SCM) [5, 16, 19, 29, 35] with recent applications in viscous flows characterized by an increasing complexity in terms of geometrical parametrization [20, 25]. This algorithm (briefly detailed in the Appendix A) is based on an offline-online computational approach, where the offline stage consists of the solution of a large number of eigenproblems of the underlying PDE at different parametric points. Using this information, a parametric lower bound for the stability factor can be constructed in a way that permits its efficient evaluation in the online stage with a computational complexity independent of the dimension of X_h . To realize such an offline/online splitting we need to have a problem that is suited to allow the assumption of *affine decomposition*, i.e.

$$a(u, v; \mu) = \sum_{q=1}^Q \Theta_q^a(\mu) a_q(u, v), \quad F(v; \mu) = \sum_{q'=1}^{Q'} \Theta_{q'}^F(\mu) F_q(v), \quad (\text{AD})$$

for given $Q, Q' \geq 1$, where the parametric bilinear forms $a_q(\cdot, \cdot)$ are continuous, and the parametric linear forms $F_q(\cdot)$ are bounded. If assumption (AD) does not hold, we cannot a priori decouple the parametric dependence of the solutions from the computational effort of solving them online. A way to resolve this issue is to exploit an approximate affine decomposition of the form

$$a(u, v; \mu) = \sum_{q=1}^Q \Theta_q^a(\mu) a_q(u, v) + e^a(u, v; \mu, Q), \quad F(v; \mu) = \sum_{q=1}^{Q'} \Theta_q^F(\mu) F_q(v) + e^F(v; \mu, Q'), \quad (\text{AAD})$$

¹We have experimented with test cases where P is at least 4. For higher-dimensional parametrizations the *curse of dimensionality* may greatly reduce the effectivity of methods based on discrete sampling of the parameter space.

where the error terms $e^a(u, v; \mu, Q)$ and $e^F(v; \mu, Q')$ are within a prescribed tolerance. For example, the Empirical Interpolation Method (EIM) can be used to give such approximations, see [2, 23], but with the following complication: Q may become quite big also in problems with a reasonable parametrization [36].

Remark 1. *The computational complexity of the offline stage of the SCM for the parametric stability factor $\beta_h(\mu)$ depends inherently on QN , where $N := \dim(X_h)$. The dependence on N is due to the eigenvalues calculation.*

Thus we observe that already for rather small problems the size of the approximate affine expansion may cause the offline stage to become potentially very expensive if rigorous stability factors are desired. In our experience, for the SCM proposed in previous works, convergence may turn to be quite slow, even for rather modest parametric complexity Q , and a relevant range of variation of parameters, and thus improvements need to be made. Our proposed approach is to limit the number of affine terms Q used in the SCM without sacrificing the accuracy of the lower bound $\beta_h^{\text{LB}}(\mu)$. This improvement will allow to treat problems with a more complex nonaffine parametrization, like the ones arising with geometrical parametrization of more complex shapes [20, 25].

The structure of the paper is as follows. In Sect. 1 we discuss our proposed two-level algorithm for the approximation of lower bounds of stability factors for complex nonaffine operators, based on two nested approximated affine decompositions (obtained through empirical interpolation): the finer approximated form containing the coarser one, a suitable correction factor bounding the coarse and the fine approximations levels and the usual successive constraint method for lower bounds computations. We address an exhaustive description of SCM and EIM methods in Appendix A and B, respectively. We show how to obtain three possible approximations of the correction factor in the elliptic coercive and noncoercive cases in Sect. 2 and Sect. 3, respectively. Then, we apply the two-level procedure to a nonaffinely parametrized Poisson problem in Sect. 4 and to a nonaffinely parametrized Helmholtz problem in Sect. 5, showing some numerical results and the computational performances and speedups – both from a qualitative and quantitative point of view – obtained by means of the two-level (coarse and fine) algorithm. In the last Sect. 6 we provide some conclusions and perspectives.

1. TWO-LEVEL AFFINE DECOMPOSITION IN THE APPROXIMATION OF STABILITY FACTORS

We introduce in this section a general procedure for the approximation of stability factors based on a two-level affine (coarse and fine) decomposition of the parametrized operators. Consider two different affine approximations to the general parametric bilinear form $a(\cdot, \cdot; \mu)$: a coarse-level affine approximation

$$a(v, w; \mu) = a^c(v, w; \mu) + e^c(v, w; \mu)$$

and a fine-level affine approximation

$$a(v, w; \mu) = a^f(v, w; \mu) + e^f(v, w; \mu)$$

being

$$a^c(v, w; \mu) = \sum_{q=1}^{Q_c} \Theta_q^c(\mu) a_q^c(v, w), \quad (1)$$

$$a^f(v, w; \mu) = a^c(v, w; \mu) + \sum_{q=Q_c+1}^{Q_f} \Theta_q^f(\mu) a_q^f(v, w), \quad (2)$$

such that $a^c(\cdot, \cdot; \mu)$ and $a^f(\cdot, \cdot; \mu)$ fulfill a *hierarchical* property and $a^c(\cdot, \cdot; \mu)$ can be seen as a truncation of $a^f(\cdot, \cdot; \mu)$. We assume that the error terms are bounded, for all $\mu \in \mathcal{P}$, by

$$|e^c(v, w; \mu)| \leq \delta_c \|v\| \|w\|, \quad |e^f(v, w; \mu)| \leq \delta_f \|v\| \|w\|,$$

being $\delta_c > 0$, $\delta_f > 0$ the continuity constants for the coarse-level and the fine-level approximation, respectively. Moreover, let us denote

$$\beta_c(\mu) = \inf_{v \in X_h} \sup_{w \in X_h} \frac{a^c(v, w; \mu)}{\|v\|_X \|w\|_X}, \quad \beta_f(\mu) = \inf_{v \in X_h} \sup_{w \in X_h} \frac{a^f(v, w; \mu)}{\|v\|_X \|w\|_X}.$$

The idea is to take the fine-level affinely parametrized problem as the exact problem, and to use the coarse-level as a surrogate for computing bounds for the stability factor bound. Thus, the fine-level affine approximation is assumed to be computed with a very small tolerance w.r.t to the nonaffine problem. A preliminary idea for this approach is in [22] (with a test case related with [21] dealing with potential flows) but without developing a fine correction on the coarse error bounds (the certification was exploited on the coarse level and the convergence of the approximation was demonstrated by a fixed point algorithm). We can prove the following general relationship between the stability factors of the coarse- and fine-level problems:

Theorem 1. Define the coarse-level supremizer operator $T_c^\mu : X_h \rightarrow X_h$ as

$$(T_c^\mu v, w)_X = a^c(v, w; \mu) \quad \text{for all } w \in X_h. \quad (3)$$

Then we have that

$$\beta_f(\mu) \geq \beta_c(\mu) + \varepsilon_{cf}(\mu),$$

where the correction term is

$$\varepsilon_{cf}(\mu) := \inf_{v \in X_h} \frac{\sum_{q=Q_c+1}^{Q_f} \Theta_q^f(\mu) a_q^f(v, T_c^\mu v)}{\|v\|_X \|T_c^\mu v\|_X}. \quad (4)$$

Proof. Using the property of the supremizer operator

$$\sup_{w \in X_h} \frac{a^c(v, w; \mu)}{\|v\|_X \|w\|_X} = \frac{a^c(v, T_c^\mu v; \mu)}{\|v\|_X \|T_c^\mu v\|_X} \quad \text{for all } v \in X_h$$

and the assumption that the coarse- and fine-level affine bilinear forms agree on the part a^c , we have that

$$\begin{aligned} \beta_f(\mu) &= \inf_{v \in X_h} \sup_{w \in X_h} \frac{a^f(v, w; \mu)}{\|v\|_X \|w\|_X} = \inf_{v \in X_h} \sup_{w \in X_h} \frac{a^c(v, w; \mu) + \sum_{q=Q_c+1}^{Q_f} \Theta_q^f(\mu) a_q^f(v, w)}{\|v\|_X \|w\|_X} \\ &\geq \inf_{v \in X_h} \frac{a^c(v, T_c^\mu v; \mu) + \sum_{q=Q_c+1}^{Q_f} \Theta_q^f(\mu) a_q^f(v, T_c^\mu v)}{\|v\|_X \|T_c^\mu v\|_X} \\ &\geq \inf_{v \in X_h} \frac{a^c(v, T_c^\mu v; \mu)}{\|v\|_X \|T_c^\mu v\|_X} + \inf_{v \in X_h} \frac{\sum_{q=Q_c+1}^{Q_f} \Theta_q^f(\mu) a_q^f(v, T_c^\mu v)}{\|v\|_X \|T_c^\mu v\|_X} = \beta_c(\mu) + \varepsilon_{cf}(\mu). \end{aligned}$$

□

We can now propose a two-level algorithm for obtaining lower bounds for the discrete stability factor $\beta_h(\mu)$. First, assume there exists a method for deriving affine expansions (2) for any desired tolerance $\delta_f > 0$, such as the empirical interpolation method reviewed in Appendix B. Then, choose δ_f sufficiently small that the fine-level affine approximate problem can be considered to be indistinguishable from the true nonaffine problem; typically this entails choosing Q_f very large, say $\mathcal{O}(10^2)$. Next, we assume that it is possible to find, according to some rule or problem dependent criterion, a good choice of $\delta_c \gg \delta_f$ such that the coarse-level affine approximation (1) has a manageable number of terms Q_c , say $\mathcal{O}(10)$, while ideally still satisfying the assumption

$$\delta_c \ll \beta_c^{\text{LB}}(\mu, \delta_c) \quad \text{for all } \mu \in \mathcal{P}, \quad (5)$$

being $\beta_c^{\text{LB}}(\mu)$ a lower bound for the coarse stability factor. If this is the case, then we perform the SCM on the coarse-level problem to obtain $\beta_c^{\text{LB}}(\mu)$; by evaluating $\varepsilon_{cf}(\mu)$ and applying the result of Theorem 1, we thus obtain a lower bound $\beta_f^{\text{LB}}(\mu)$ also for $\beta_f(\mu)$. Since δ_f was chosen very small, this lower bound also acts as a good estimate for the true discrete stability factor $\beta_h(\mu)$.

Exact evaluation of the correction term $\varepsilon_{cf}(\mu)$ would require the solution of a generalized eigenvalue problem, which is usually not feasible in an online evaluation context. Therefore, we propose in the next section some rigorous and less-than-rigorous approximations $\tilde{\varepsilon}_{cf}(\mu)$ that allow efficient online evaluation while still giving reasonable lower bounds for the stability factor $\beta_f(\mu)$. The computational cost is reduced in both the offline and online stages: since the computational cost of SCM depends highly on Q , by replacing Q_f with Q_c we potentially greatly reduce the cost of the offline part of the stability lower bound estimation, and if an inexpensive surrogate $\tilde{\varepsilon}_{cf}(\mu)$ for the correction term can be computed online, then also the online cost of the lower bound computation is slightly decreased.

We remark that the a good choice of δ_c that satisfies (5) is not in general easy. For simple coercive problems a cheap lower bound surrogate, $0 < \tilde{\beta}_c^{\text{LB}}(\mu, \delta_c) \leq \beta_c^{\text{LB}}(\mu, \delta_c)$, might be available, which together with an iterative procedure can be used to choose δ_c . In noncoercive problems it is possible that for any $\delta_c > 0$ there exists $\mu^* \in \mathcal{P}$ such that $\beta_c^{\text{LB}}(\mu^*, \delta_c) = 0$. In the numerical examples we demonstrate that even for such problems a reasonable truncation of the affinely parametrized problem can sometimes be found.

2. CORRECTION METHODS IN AN ELLIPTIC COERCIVE CASE: THE POISSON EQUATION

Let us now discuss some possible ways to approximate the correction term $\varepsilon_{cf}(\mu)$ defined in (4). For the sake of simplicity, we consider first a (generalized) parametric Poisson equation. Nevertheless, this proposed methodology could be applied in problems where SCM has been exploited for the computation of stability factor lower bounds to certify not only scalar potential flows [21, 33] but also vectorial linear elasticity problems [18] and viscous Stokes flows treated with a penalty approach [12].

Denote by $a(u, v; \nu(\mu))$ the parameter-dependent continuous bilinear form:

$$a(u, v; \nu(\mu)) := \int_{\Omega} \nu(\mu; \mathbf{x}) \nabla u(\mathbf{x}) \cdot \nabla v(\mathbf{x}) d\Omega;$$

the discrete problem is to find $u_h \in X_h$ s.t.

$$a(u_h, v_h; \nu(\mu)) = F(v_h; \mu) \quad \forall v_h \in X_h,$$

being $\nu(\mu; \mathbf{x}) \in C^1(\mathcal{P}; L^\infty(\Omega))$ a scalar coefficient function such that $\nu(\mu; \mathbf{x}) \geq \nu_0 > 0$ for all $\mathbf{x} \in \Omega$, $\mu \in \mathcal{P}$, so that the problem is uniformly coercive. In this case the stability factor simplifies to

$$\inf_{v_h \in X_h} \sup_{w_h \in X_h} \frac{a(v_h, w_h; \nu(\mu))}{\|v_h\|_X \|w_h\|_X} = \inf_{v_h \in X} \frac{a(v_h, v_h; \nu(\mu))}{\|v_h\|_X^2} =: \alpha(\nu(\mu)),$$

i.e. the coercivity constant, and it suffices to replace the supremizer in (4) with the identity operator, $T_c^\mu \rightarrow I$. Moreover, we can identify the coarse- and the fine-level approximations (1)-(2) of $a(u, v; \nu(\mu))$ as follows:

$$a^c(u, v; \mu) := a(u, v; \nu_c(\mu)), \quad a^f(u, v; \mu) := a(u, v; \nu_f(\mu)),$$

being $\nu_c = \nu_c(\mu, \mathbf{x})$ and $\nu_f = \nu_f(\mu, \mathbf{x})$ the coarse- and fine-level approximation of the parametrized tensor $\nu(\mu; \mathbf{x})$. Thus we obtain the coarse-fine correction term (4) of Theorem 1 in the simpler form

$$\varepsilon_{cf}(\mu) = \inf_{v \in X_h} \frac{\sum_{q=Q_c+1}^{Q_f} \Theta_q^f(\mu) a_q^f(v, v)}{\|v\|_X^2}. \quad (6)$$

We can propose three different estimators for (6):

(I) Constant correction (CC)

$$\varepsilon_{cf}^{CC}(\mu) := -(\delta_c + \delta_f);$$

(II) Global infimum (GI)

$$\varepsilon_{cf}^{GI}(\mu) := \inf_{\mathbf{x} \in \Omega} \{\nu_f(\mu, \mathbf{x}) - \nu_c(\mu, \mathbf{x})\};$$

(III) One-point correction (OP)

$$\varepsilon_{cf}^{OP}(\mu) := -[\delta_f + \hat{\epsilon}_M^c(\mu)],$$

where $\hat{\epsilon}_M^c(\mu)$ is defined in (19) and it represents a measure of the error committed during the empirical interpolation procedure for a nonaffine parametrization [2] (see Appendix B for details on this procedure). Thus, we can show the following result:

Theorem 2. *Assume that the bound $\max_{\mu \in \mathcal{P}} \|\nu(\mu, \cdot)\|_{L^\infty(\Omega)} \leq C < \infty$ holds and the one-point estimator of (19) is computed at the interpolation point t_{Q_c+1} s.t. $\eta := \max_{\mu \in \mathcal{P}} |t_{Q_c+1} - \mu|$. For the estimators above we have, for all $\mu \in \mathcal{P}$, the following inequalities:*

(I)

$$\varepsilon_{cf}^{CC}(\mu) \leq \varepsilon_{cf}(\mu);$$

(II)

$$\varepsilon_{cf}^{GI}(\mu) \leq \varepsilon_{cf}(\mu);$$

(III)

$$\varepsilon_{cf}^{OP}(\mu) \leq \varepsilon_{cf}(\mu) + C\eta(1 + \Lambda_{Q_c}),$$

where the Lebesgue constant $\Lambda_{Q_c} \leq 2^{Q_c} - 1$ is related to the empirical interpolation procedure.

Proof. (I) Since $\|\nu_f(\mu) - \nu_c(\mu)\|_{L^\infty(\Omega)} \leq \delta_c + \delta_f$ for all $\mu \in \mathcal{P}$, we can estimate

$$\begin{aligned} \varepsilon_{cf}(\mu) &= \inf_{v \in X_h} \frac{a(v, v; \nu_f(\mu) - \nu_c(\mu))}{\|v\|_X^2} = -\sup_{v \in X_h} \frac{a(v, v; \nu_c(\mu) - \nu_f(\mu))}{\|v\|_X^2} \\ &\geq -\sup_{\mathbf{x} \in \Omega} \{\nu_c(\mu, \mathbf{x}) - \nu_f(\mu, \mathbf{x})\} \sup_{v \in X_h} \frac{a(v, v; 1)}{\|v\|_X^2} \geq -(\delta_c + \delta_f). \end{aligned}$$

(II) Similarly to the previous case, we have

$$\varepsilon_{cf}(\mu) = -\sup_{v \in X_h} \frac{a(v, v; \nu_c(\mu) - \nu_f(\mu); \mu)}{\|v\|_X^2} \geq -\sup_{\mathbf{x} \in \Omega} \{\nu_c(\mu, \mathbf{x}) - \nu_f(\mu, \mathbf{x})\} = \inf_{\mathbf{x} \in \Omega} \{\nu_f(\mu, \mathbf{x}) - \nu_c(\mu, \mathbf{x})\}.$$

(III) Applying the a posteriori estimates derived in [6], we obtain

$$\sup_{\mathbf{x} \in \Omega} \{\nu_c(\mu, \mathbf{x}) - \nu(\mu, \mathbf{x})\} \leq C\eta(1 + \Lambda_{Q_c}) + \|\nu(\mu, t_{Q_c+1}) - \nu_c(\mu, t_{Q_c+1})\|_{L^\infty(\Omega)} = C\eta(1 + \Lambda_{Q_c}) + \hat{\epsilon}_{Q_c}^c(\mu)$$

and thus

$$\begin{aligned} \varepsilon_{cf}(\mu) &\geq \inf_{\mathbf{x} \in \Omega} \{\nu_f(\mu, \mathbf{x}) - \nu_c(\mu, \mathbf{x})\} = \inf_{\mathbf{x} \in \Omega} \{[\nu_f(\mu, \mathbf{x}) - \nu(\mu, \mathbf{x})] + [\nu(\mu, \mathbf{x}) - \nu_c(\mu, \mathbf{x})]\} \\ &\geq -\delta_f - \sup_{\mathbf{x} \in \Omega} \{\nu_c(\mu, \mathbf{x}) - \nu(\mu, \mathbf{x})\} \geq -(\delta_f + \hat{\epsilon}_{Q_c}^c(\mu)) - C\eta(1 + \Lambda_{Q_c}), \end{aligned}$$

where the upper bound for the Lebesgue constant is demonstrated in [2]. □

Remark 2. *The pessimistic bound given by the case (III) of Theorem 2 is in fact sharp if $\nu \in L^\infty(\mathcal{P}; L^\infty(\Omega))$, see [23]. In practice much better behavior is observed, as we will demonstrate in the numerical examples. By assuming further regularity on $\nu(\mu, \mathbf{x})$, a better a posteriori estimate can be derived, as shown in [6].*

3. CORRECTION METHODS IN AN ELLIPTIC NONCOERCIVE CASE: THE HELMHOLTZ EQUATION

From a mathematical point of view, noncoercive problems exhibit greater difficulties for stability analysis even in the most simple cases. We consider the scalar Helmholtz problem, denoting in this case $a(u, v; \nu(\mu))$ the following bilinear form:

$$a(u, v; \nu(\mu)) := \int_{\Omega} [\nu(\mathbf{x}, \mu) \nabla u \cdot \nabla v - \omega^2 uv] d\Omega,$$

where the frequency parameter ω and mesh size parameter h are chosen in such a way that the finite element approximation does not suffer from excessive “pollution”; typically $\omega^2 h < 1$ [1]. A specific difficulty related to the stability of this noncoercive problem is that at the eigenvalues $\lambda = \omega^2$ of the generalized Laplacian operator $-\nu \Delta$ the problem is not well-posed, and the stability factor becomes singular. Since the spectrum $\Lambda(-\nu \Delta)$ of the operator depends on the parameter μ , it is not always possible to have a priori knowledge of the resonance frequencies and therefore the proposed method should be able also to identify resonance frequencies for certain parameter values in the parameter range. Note that in this case the parametric dependence acts only on the elliptic part of the operator, which allows us to estimate (6) as follows:

$$\varepsilon_{cf}(\mu) = \inf_{v \in X_h} \frac{a^f(v, T_c^\mu v; \mu) - a^c(v, T_c^\mu v; \mu)}{\|v\|_X \|T_c^\mu v\|_X} = - \sup_{v \in X_h} \frac{a(v, T_c^\mu v, \nu_c(\mu) - \nu_f(\mu))}{\|v\|_X \|T_c^\mu v\|_X} \geq \inf_{\mathbf{x} \in \Omega} \{\nu_f(\mu, \mathbf{x}) - \nu_c(\mu, \mathbf{x})\}$$

and thus obtain in theory the same estimators for $\varepsilon_{cf}(\mu)$ as in the coercive case. However, since in practice $\beta_f(\mu) \ll 1$ and even negative for some finite number of parameter points μ , we can expect that the correction terms given in the previous section will be much more sensitive to the choice of δ_c . This proposed method can be used also for vectorial elliptic noncoercive problems [20, 25].

4. NUMERICAL EXAMPLES OF COARSE-LEVEL BOUNDS FOR THE POISSON EQUATION

In this section we introduce a numerical example of elliptic coercive problem dealing with a parametrized Poisson equation. To demonstrate the effectiveness of the corrections detailed in Sections 2 and 3 we consider a manufactured example where the combination of the standard Empirical Interpolation (EIM) and the Successive Constraint (SCM) methods produces poor results. Let $\Omega = (0, 1)^2$ and consider the following scalar parametrized elliptic PDE: find $u_h \in X_h \subset H_0^1(\Omega)$ such that

$$\int_{\Omega} \nu(\mu, x) \nabla u_h \cdot \nabla v_h d\Omega = \int_{\Omega} f v_h d\Omega \quad \forall v_h \in X_h,$$

where the scalar diffusivity function is

$$\nu(\mu, x) := \exp(\mu_1 + \mu_2) \left[1 + \exp \left(- \frac{(x_1 - \mu_1)^2 + (x_2 - \mu_2)^2}{0.02} \right) \right] \quad (7)$$

and $\mu \in \mathcal{P} := [0.4, 0.6]^2$. The coefficient function consists of two parts: a simple exponential scaling factor and a highly localized Gaussian peak which moves around the domain [6]. The first term drives the scaling of the problem and consequently the coercivity constant; the Gaussian function does not greatly contribute to the coercivity constant, but does present difficulties for the EIM because of the difficulty of approximating a localized Gaussian function as a linear combination of localized Gaussians located at different sites. Thus the number of terms in the EIM expansion grows rather rapidly. We performed the SCM on the test problem at both a coarse level, $\delta_c = 10^{-2}$ and $Q_c = 20$, and at a fine level, $\delta_f = 10^{-6}$ and $Q_c = 60$, to obtain the corresponding lower bounds α_{LB}^c and α_{LB}^f . To remove uncertainties related to the random sampling in the standard greedy

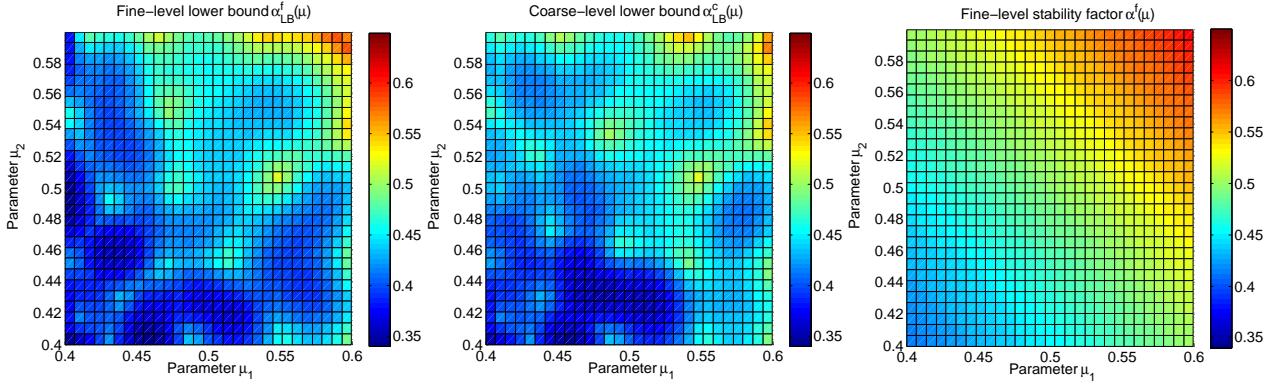


FIGURE 1. Comparison of the lower bounds $\alpha_{LB}^c(\mu)$ and $\alpha_{LB}^f(\mu)$ (without corrections) and the true parametric coercivity constant $\alpha^f(\mu)$; lower bounds are obtained from SCM with tolerance ratio $\varepsilon_* = 0.25$ and maximum number of constraints $K_{max} = 20$.

SCM algorithm, a fixed training sample $|\Xi_{\text{train}}| = 1000$ was used to drive all the tests; moreover, we settled on using a tolerance ratio $\varepsilon_* = 0.25$ such that

$$\rho(\mu) := \frac{\alpha_{UB}(\mu) - \alpha_{LB}(\mu)}{\alpha_{UB}(\mu)} < \varepsilon_*$$

for all $\mu \in \Xi_{\text{train}}$ to mark that the SCM algorithm had obtained a sufficiently good lower bound. This resulted in a maximum number of $K_{max} = 20$ constraints (see Appendix A) for both the coarse- and fine-level SCMs, but considerably different locations for the constraint points. In Fig. 1 the lower bounds α_{LB} for the coarse- and fine-level problems obtained from the SCM are shown, as well as the true coercivity $\alpha^f(\mu)$ of the (fine-level) problem; as expected, it is almost entirely dependent on the scaling term $\exp(\mu_1 + \mu_2)$. Qualitatively there are few differences between the coarse and fine lower bounds, except that the fine level bounds are slightly more pessimistic, due to the extra information coming from the residual terms that are not included in the coarse level expansion.

We computed the corrections (GI), (CC), and (OP) for the given coarse-level $\alpha_{LB}^c(\mu)$ to obtain the corrected lower bounds for $\alpha^f(\mu)$. In Fig. 2 we plot the bound gap $\alpha^f(\mu) - (\alpha_{LB}^c(\mu) + \text{correction } \varepsilon_{cf}(\mu))$ for each method. The first observation is that indeed in every case we obtain a lower bound for the coercivity constant, even using (OP) which is not a priori guaranteed to give a rigorous lower bound². The (CC) method naturally gives always the largest bound gap, while the (GI) option gives the tightest bounds but requires evaluation of the coefficient function and a costly maximization over the entire domain.

Remark 3. At first it seems paradoxical that dropping terms from the EIM expansion would result in more effective error bounds, after all the coarse-level problem is potentially a poor approximation to the original PDE. But when one considers that for Q large the SCM typically needs to increase the number of point constraints J_{\max} , the situation becomes clear. A feature of affine expansions obtained from EIM is that the parametric coefficient functions $\Theta_q(\mu)$ decay rapidly to zero as $q \rightarrow \infty$. That is to say, the first few terms in the expansion have a disproportionate effect on the problem (and subsequently its coercivity). This property is not considered in any way by the standard SCM algorithm, where all coefficients are treated equal. In a way, the algorithm performs a lot of additional work with low influence constructing constraints to search for lower bounds in the coefficient space of dimension $Q_f = 60$ when it suffices to search just the coefficient space of dimension $Q_c = 20$ consisting of the most significant terms.

²This lack of rigor is put into evidence in Table 1, where the result reported in the last line shows an effectivity (slightly) smaller than one.

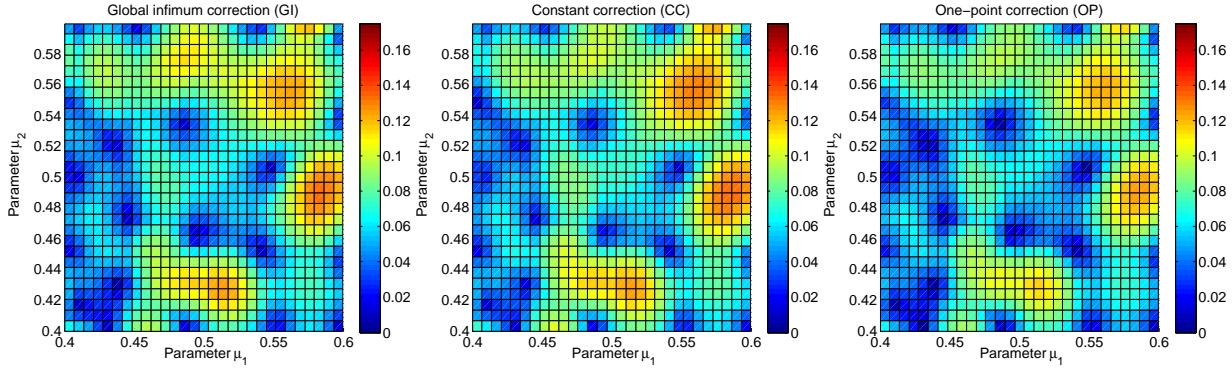


FIGURE 2. Bound gaps between the parametric coercivity constant $\alpha^f(\mu)$ and the corrected lower bounds for $\alpha_{LB}^c(\mu)$ using the three methods: global infimum (GI, left), constant correction (CC, center), and one-point correction (OP, right); lower bounds are obtained from SCM with tolerance ratio $\varepsilon_* = 0.25$ and maximum number of constraints $K_{max} = 20$.

Concerning the computational cost, in the offline stage we have in the SCM a count of $\mathcal{O}(Q)$ eigenproblems, $\mathcal{O}(QK_{max})$ operations to form \mathcal{Y}_{UB} , and $\mathcal{O}(J_{max})$ linear programming problems of size $\mathcal{O}(Q)$ to solve. Thus the cost of SCM scales primarily like $\mathcal{O}(QK_{max})$. Based on previous observations we can play with the two variables, Q and K_{max} , which behave in some sense in opposite way. Increasing K_{max} will increase the computational cost, but also will monotonically improve the bounds obtained. The number of terms in the expansion Q on the other hand works in almost completely opposite way – as long as $Q_c \geq Q^*$, some cutoff point Q^* at which the correction in the coercivity constant dominates the bounds, it is possible that further increasing Q_c will in fact make the a posteriori bounds worse if K_{max} is kept fixed due to the fact the SCM needs many more point constraints to satisfactorily eliminate the parts of the coefficient space that we are never going to explore. Thus a rule of thumb could be to make Q_c just large enough so that the correction term is of an order of magnitude smaller than $\alpha^f(\mu)$, and then to increase K_{max} in order to improve the stability factor lower bound.

In Table 1 we display the computed efficiencies α_f/α^{LB} of the fine-level lower bound, the uncorrected coarse-level lower bound, and the three different corrected coarse-level lower bounds over a range of 500 different parameter points in $\mu \in \mathcal{P} := [0.4, 0.6]^2$. In Table 2 we present the offline cost of constructing the lower bound surface using the successive constraint method at both the coarse- and fine-level. A speedup factor of 30% in the offline SCM step was observed while still obtaining effective stability factor lower bounds. Online computational costs of coarse stability factors and corrections are the same as the online costs for the fine stability factors, so we are not slowing the online SCM step.

	effectivity α_f/α^{LB}		
	min	avg	max
Coarse	1.0087	1.1587	1.3459
Fine	1.0088	1.1625	1.3350
Coarse + (CC) correction	1.0285	1.1862	1.3769
Coarse + (GI) correction	1.0184	1.1793	1.3818
Coarse + (OP) correction	0.9894 ²	1.1588	1.3475

TABLE 1. Effectivities of stability factor lower bounds for $\delta_c = 10^{-2}$ and $Q_c = 20$.

	tolerance δ	affine terms Q	SCM iterations	μ^* points	CPU time (s)
Fine level	$5 \cdot 10^{-6}$	59	20	20	2 741
Coarse level	$1 \cdot 10^{-2}$	20	19	19	1 963

TABLE 2. Offline computational complexity of the SCM in the coarse and fine level.

5. NUMERICAL EXAMPLES OF COARSE-LEVEL BOUNDS FOR THE HELMHOLTZ EQUATION

In this section we introduce a numerical example of elliptic noncoercive problem dealing with a parametrized Helmholtz equation. In particular, we consider the reflection of time-harmonic waves on a stealth aircraft wing profile as in [27]. The computational domain Ω and mesh are displayed in the Fig. 3(a). A Kármán-Treffitz airfoil [15, 26] reflects an incoming time-harmonic wave with wave vector $\mathbf{k} = \omega \mathbf{e}_1$ so that the complex amplitude u_h of the reflected wave in the frequency plane satisfies the Helmholtz equation: find $u_h \in X_h \subset H_0^1(\Omega)$ such that

$$\int_{\Omega} \nu(\mu; \mathbf{x}) \nabla u_h \cdot \nabla v_h \, d\Omega - \omega^2 \int_{\Omega} u_h v_h \, d\Omega = 0 \quad \text{for all } v_h \in X_h,$$

with Dirichlet condition $u_h|_{\Gamma_{foil}} = -\exp(i\mathbf{k} \cdot \mathbf{x})$ on the airfoil, and for simplicity the natural boundary condition is assumed on the far-field boundary. For the frequency we fixed $\omega = 2.5$. The magnetic reluctivity ν is chosen as the parametric function

$$\nu(\mu; z) = 0.9 \cdot H_{\epsilon}(|\kappa^{-1}(z)|; \mu) + 0.1$$

where the real plane is identified with the complex numbers, $\mathbf{x} \mapsto z$, so that $\kappa : \mathbb{C} \rightarrow \mathbb{C}$ is a Kármán-Treffitz map defined in the complex plane as

$$z = \kappa(\zeta) := \left[\left(\frac{\zeta - 1}{\zeta + \frac{1}{2}} \right)^2 - 1 \right]^{-1},$$

and the smoothed radial step function H_{ϵ} is defined as

$$H_{\epsilon}(r) := \begin{cases} 0, & r \leq \mu - \epsilon \\ \frac{1}{2} \left[1 + \frac{r - \mu}{\epsilon} + \frac{1}{\pi} \sin \frac{\pi(r - \mu)}{\epsilon} \right], & \mu - \epsilon < r < \mu + \epsilon \\ 1, & r \geq \mu + \epsilon \end{cases}$$

with constant $\epsilon = 0.1$. For the parameter range $\mu \in [1, 1.5]$ this rather complicated coefficient function models an absorbing coat of paint on the surface of the airfoil, where $\mu - 1$ is the thickness of the layer of coating [27]. Approximating the nonaffinely parametrized coefficient function with the empirical interpolation procedure gives an expansion with rapidly increasing number of terms. For the coarse-level tolerance we chose $\delta_c = 1e-3$ and for the fine-level tolerance $\delta_f = 1e-5$. The corresponding number of affine terms were $Q_c = 27$ and $Q_f = 119$.

The location of the resonance frequencies depends on μ in quite a complicated way. In Fig. 3(b) we display the approximate locations of resonances in the (μ, ω) plane. For the fixed frequency choice of $\omega = 2.5$ (dashed horizontal line) we expect to find only one resonance point, near $\mu \approx 1.27$. A requirement for any algorithm for computing (approximations of) stability factors is that they must correctly identify points of resonance, because in practical engineering design the presence of undiscovered resonances can lead to catastrophic results [13]. For comparison purposes we computed the stability factor lower bounds using both the lower bounds for the stability factors of the coarse- and fine-level approximations obtained by the natural norm SCM with a uniform training sample $|\Xi_{train}| = 1500$ and a stopping ratio $\rho < 0.25$. In Fig. 4(a) we display the true fine-level stability factor $\beta_f(\mu)$ and the fine level lower bound $\beta_f^{LB}(\mu)$. Sample points where no positive lower bound for the stability factor were obtained are denoted by vertical lines.

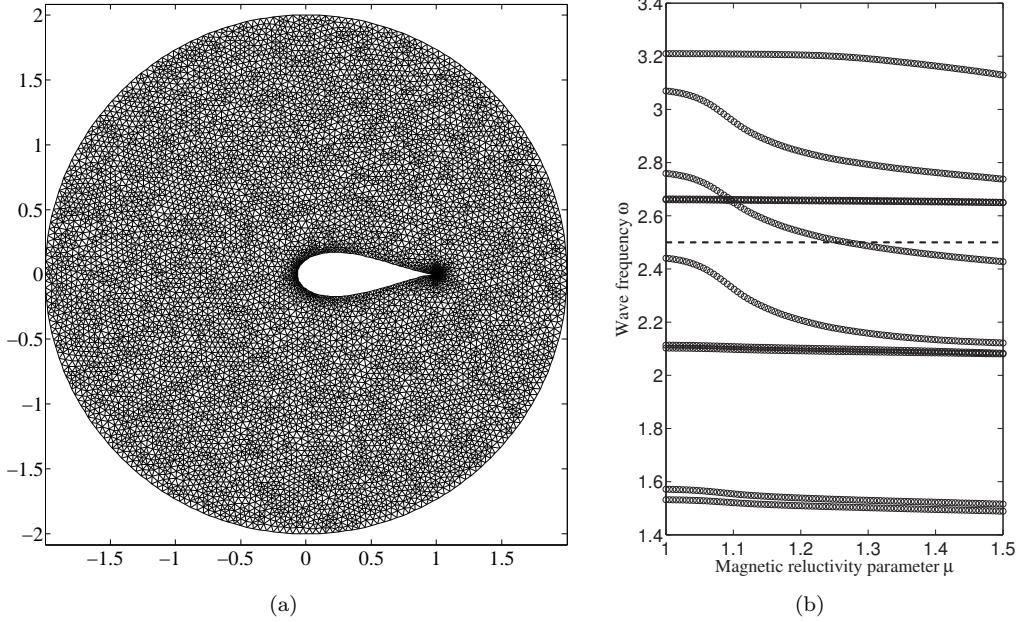


FIGURE 3. (a) Computational domain and mesh for the Helmholtz scattering problem; (b) Approximate resonance lines in the (μ, ω) -plane for the Helmholtz example.

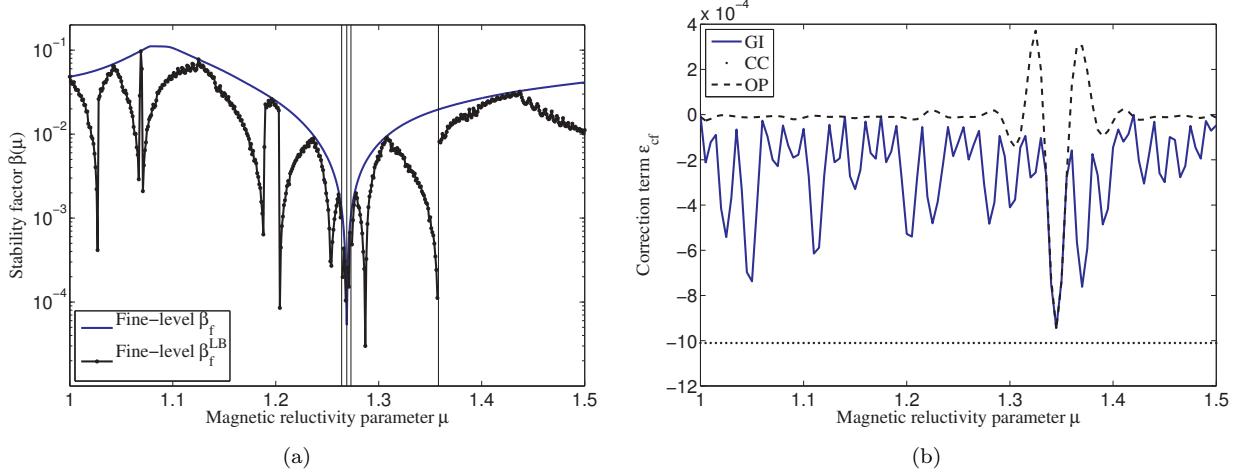


FIGURE 4. (a) Stability constant $\beta_f(\mu)$ and lower bound for the fine-level approximation of the Helmholtz problem with $\delta_f = 1e-5$; (b) the three correction terms ε_{cf}^{GI} , ε_{cf}^{CC} , and ε_{cf}^{OP} .

In Table 3 we display the computed efficiencies of the fine-level lower bound β_f/β_f^{LB} , the uncorrected coarse-level lower bound β_f/β_c^{LB} , and the three different corrected coarse-level lower bounds $\beta_f/(\beta_c^{LB} + \varepsilon_i)$ with $i = CC, GI, OP$, over a range of 500 different parameter points in $\mu \in [1, 1.5]$. These quantities measure the quality of the proposed lower bounds: to be *reliable*, we shall require efficiencies ≥ 1 ; to be *effective*, we desire efficiencies as close as possible to 1. We also display the total number of sample points in the

	effectivity $\beta_f/\beta_*^{\text{LB}}$			# failed points
	min	avg	max	
Coarse	1.0001	4.47	177.17	7
Fine	1.0000	5.54	271.01	4
Coarse + (CC) correction	1.0133	11.1	2698.1	39
Coarse + (GI) correction	1.0007	9.75	773.83	9
Coarse + (OP) correction	1.0003	9.34	972.17	7

TABLE 3. Effectivities of stability factor lower bounds for $\delta_c = 10^{-3}$ and $Q_c = 27$

	tolerance δ	affine terms Q	SCM iterations	μ^* points	CPU time (s)
Fine level	10^{-5}	119	297	16	14 567
Coarse level	10^{-3}	27	297	17	5 816

TABLE 4. Offline computational complexity of the successive constraint method

range where a positive lower bound was not obtained. In this case the coarse-level lower bound without any corrections actually behaves the best, even better than the fine-level lower bound. Again we attribute this to the convergence difficulties faced by the SCM when a large number of affine terms $Q_f = 119$ are used. The coarse lower bound β_c^{LB} turns out to be reliable in this case, but it is important to realize that a priori we cannot make such an assumption. Therefore, it is necessary to correct the coarse-level lower bound to obtain a lower bound that is rigorously reliable. We remark that for this particular problem the stability factor lower bound is for several parameter points below the tolerance used for the coarse-level approximation, $\delta_c \gg \beta_c^{\text{LB}}(\mu)$, so that the constant correction method (CC) behaves poorly. Using this method a large number of sample points do not have a positive lower bound, and thus “ghost resonances” are predicted. The global infimum method (GI) is much better in comparison. In this test case the best correction turns out to be the one-point method (OP), which adds no failed points while remaining both reliable and on the average more effective than the (GI) method with a considerably less expensive online evaluation cost. However, in general we cannot expect the (OP) method to give reliable lower bounds and for this reason the (GI) method is the preferable one for noncoercive problems with resonances. In Table 4 we present the offline cost of constructing the lower bound surface using the successive constraint method at both the coarse- and fine-level. For this problem the coarse-level offline procedure gives a computational time reduction of 60%; moreover, by choosing the (GI) method in this case the stability factor lower bounds are also reasonable since they do not substantially differ from the ones that would be obtained by SCM when applied to the fine-level approximation.

6. CONCLUSION

The proposed methodology may represent a considerable reduction in terms of computational times and complexity in running offline expensive steps to prepare for the online evaluation of parametric stability factors. These quantities are crucial ingredients for error bounds certifying the rapid solution of parametric PDEs approximated for example by a reduced basis method.

Our tests on elliptic linear scalar problems both in the coercive (Poisson) and in the noncoercive (Helmholtz) case underline that the correction in the stability factor computed by the global infimum (GI) option is reliable and accurate and it represents a good compromise in terms of effectivity. The first option with a constant correction (CC) factor is better for the coercive test problem, while the third one based on a one point (OP) correction factor seems better in the noncoercive test problem, but affecting a bit the effectivity. The improvement aspects we dealt with are related only to stability factors computations. Other recent works addressing different needs of improvement in terms of offline procedure and performances for certified reduced order modelling by

reduced basis method are related to the study of better sampling strategies in the parametric space [8, 9] and to a two-step approximation [7] recalling again the need of a coarse and fine approximation level.

Important improvements are expected in the application of this methodology in nonlinear problems with nonaffine complex geometric parametrizations [24] governed by Navier-Stokes equations. A further activity of interest in this field is the development of the same coarse-fine approach to parametric lower bounds for the Brezzi inf-sup constant. This would lead to a different error bound [4, 38] for the Stokes problem, with respect to the one based on the lower bound for the Babuška inf-sup constant proposed in [34] and considered in this work with a scalar linear elliptic problem.

ACKNOWLEDGEMENTS

We thank A. T. Patera and D. B. P. Huynh from MIT for their valuable comments regarding the methods in this article, useful insights, and for the contributions in the rbMIT reduced basis software [17] with C. N. Nguyen. This work has been supported in part by the Swiss National Science Foundation (Project 200021-122136) and by the Emil Aaltonen Foundation (Helsinki, Finland).

APPENDIX A. DESCRIPTION OF THE SUCCESSIVE CONSTRAINT METHOD

In this Appendix we review the Successive Constraint Method used for the estimation of lower and upper bounds of stability factors. This algorithm has been first introduced in [19] for both coercive and noncoercive problems, more deeply analyzed in [35] in the coercive case and afterwards improved in [5]. A general version using the so-called “natural norm” [37] has been analyzed in [16]. We recall here the basic ingredients of this second version in the more general case of noncoercive problems used for example in saddle point problems such as the Stokes case [20, 34]; the simpler coercive case can be seen as a particular instance where the stability factor is just the coercivity constant.

Our goal is to build a lower bound for the inf-sup stability factor

$$\beta(\mu) := \inf_{v \in X_h} \sup_{w \in X_h} \frac{a(v, w, \mu)}{\|v\|_X \|w\|_X} = \inf_{v \in X_h} \frac{a(v, w, \mu)}{\|v\|_X \|T^\mu v\|_X},$$

being $w = T^\mu v$ the supremizer operator $T^\mu : X_h \rightarrow X_h$ defined as

$$(T^\mu v, w)_X = a(v, w; \mu), \quad \text{for all } w \in X_h.$$

The *natural norm* approach we have adopted is based on the patching of some local (or *surrogate*) inf-sup stability factors properly computed for a set of K parameter values $S^* = \{\mu_1^*, \dots, \mu_K^*\}$. In order to motivate this approach, let us analyze the discrete version of the problem; in particular, we shall observe that the computation of the stability factor

$$\beta(\mu) := \inf_{v_h \in X_h} \sup_{w_h \in X_h} \frac{a(v_h, w_h, \mu)}{\|v_h\|_X \|w_h\|_X}$$

in the discrete case can be formulated as finding a minimum eigenvalue, since

$$\beta^2(\mu) = \left(\inf_{v_h \in X_h} \sup_{w_h \in X_h} \frac{a(v_h, w_h, \mu)}{\|v_h\|_X \|w_h\|_X} \right)^2 = \left(\inf_{u_h \in X_h} \frac{\|T^\mu v_h\|_X}{\|v_h\|_X} \right)^2 = \inf_{v_h \in X_h} \frac{\|T^\mu v_h\|_X^2}{\|v_h\|_X^2}.$$

Let us denote with $v_h = \sum_{j=1}^N v_j \varphi_j$ a generic element of the discrete space X_h , being $\{\varphi_j\}_{j=1}^N$ a FE basis of X_h and $(\mathbf{v})_j = v_j$ its vector representation. By introducing the discrete inner product $(v_h, w_h)_X = \mathbf{v}_h^T \mathbb{X} \mathbf{w}_h$

being $\mathbb{X}_{ij} = (\varphi_i, \varphi_j)_X$ with the Cholesky decomposition $\mathbb{X} = \mathbb{H}^T \mathbb{H}$, we obtain the following eigenvalue problem in matrix form: find $(\beta^2(\mu), \mathbf{v}_h)$, $\mathbf{v}_h \neq 0$, s.t.

$$(\mathbb{H}^{-T} \mathbb{A}(\mu) \mathbb{X} \mathbb{A}(\mu) \mathbb{H}^{-1}) \mathbf{v}_h = \beta^2(\mu) \mathbf{v}_h \quad \text{for each } \mathbf{v}_h \neq 0, \quad (8)$$

being $A_{ij}(\mu) = a(\varphi_j, \varphi_i; \mu)$. The original version of SCM proposed in [19] deals with affine coercive operators under the assumption (AP), and thus features a complexity of order $\mathcal{O}(Q)$; its extension to affine noncoercive operators – and then to the solution of problem (8) – is straightforward, even if this implies a complexity which is of order $\mathcal{O}(Q^2)$ – too cumbersome for problems with larger Q like the ones coming from EIM. The “natural norm” approach overcomes this limitation by means of a different strategy, based on the computation of a lower bound for a surrogate inf-sup stability factor $\beta_{\mu^*}(\mu)$. We define, for a fixed parameter value μ^* ,

$$\beta_{\mu^*}^S(\mu) = \inf_{v \in X_h} \sup_{w \in X_h} \frac{a(v, w, \mu)}{\|w\|_X \|T^{\mu^*} v\|_X}; \quad (9)$$

since we assume that $\beta(\mu) > 0$ for all $\mu \in \mathcal{D}$, $\|T^{\mu^*} \cdot\|_X$ is a well-defined norm (which is equivalent to $\|\cdot\|_X$ in a neighborhood $\mathcal{P}_{\mu^*} \ni \mu^*$), called *natural norm*. A lower bound for the surrogate $\beta_{\mu^*}^S(\mu)$ is thus given by

$$\beta_{\mu^*}^{SLB}(\mu) = \inf_{v \in X_h} \sup_{w \in X_h} \frac{a(v, T^{\mu^*} v; \mu)}{\|T^{\mu^*} v\|_X^2}, \quad (10)$$

thanks to the definition of the supremizer operator. It is also possible to show [37] that $\beta_{\mu^*}^{SLB}(\mu)$ is a good approximation to $\beta_{\mu^*}(\mu)$ when $\mu \rightarrow \mu^*$, i.e.

$$|\beta_{\mu^*}^{SLB}(\mu) - \beta_{\mu^*}(\mu)| = \mathcal{O}(|\mu - \mu^*|^2) \quad \text{when } \mu \rightarrow \mu^*.$$

Following the same analogy introduced before, $\beta_{\mu^*}^{SLB}(\mu)$ can be seen as the solution of the following eigenproblem in matrix form: find the smallest $\beta_{\mu^*}(\mu)$ such that

$$(\mathbb{H} \mathbb{A}(\mu) \mathbb{A}^{-1}(\mu^*) \mathbb{H}^{-1}) \mathbf{v}_h = \beta_{\mu^*}(\mu) \mathbf{v}_h \quad \text{for each } \mathbf{v}_h \neq 0. \quad (11)$$

The point is that, unlike the version (8), for fixed μ^* the operator on the right-hand-side of (11) contains only Q terms. Moreover, since it can be shown [37] that

$$\beta(\mu^*) \beta_{\mu^*}^{SLB}(\mu) \leq \beta(\mu),$$

it is sufficient to compute a lower bound $\beta_{\mu^*}^{LB}(\mu) \leq \beta_{\mu^*}^{SLB}(\mu)$ for the surrogate (10) and some $\beta(\mu^*)$ on the selected μ^* , and then translate it into a lower bound for $\beta(\mu)$.

The SCM procedure for the computation of a *global* lower bound, i.e. valid for each $\mu \in \mathcal{D}$, can be seen as the combination between two main ingredients, discussed in the following subsections:

- construction of a local lower bound $\beta_{\mu^*}^{LB}(\mu)$ upon a given parameter value $\mu^* \in \mathcal{S}$, being $\mathcal{S} = \{\mu^{1*}, \dots, \mu^{S*}\}$ a set of S parameter values properly (and iteratively) sampled;
- combination of the local lower bounds computed upon each $\mu^{s*} \in \mathcal{S}$.

Construction of a local lower bound $\beta_{\mu^*}^{LB}(\mu)$

Let us analyze the construction of a local lower bound (10) for the surrogate inf-sup stability factor (9), considering a chosen μ^* value; since this surrogate problem is coercive, the standard successive constraint method [19] can be used. Let us denote $\Xi_{train} \subset \mathcal{D}$ a very rich training sample, playing the role of \mathcal{D} throughout

the algorithm. First of all, we rewrite the eigenvalue problem (10) as a proper minimization problem; by introducing the following linear objective functional:

$$J^{obj}(\mathbf{y}; \mu) = \sum_{q=1}^Q \Theta^q(\mu) y_q, \quad \text{with } \mathbf{y} = (y_1, \dots, y_Q),$$

and the following constraint set $\mathcal{Y}_* \subset \mathbb{R}^Q$:

$$\mathcal{Y}_* = \left\{ \mathbf{y} \in \mathbb{R}^Q : \exists w_{\mathbf{y}} \in X \text{ s.t. } y_q = \frac{a^q(w_{\mathbf{y}}, T^{\mu^*} w_{\mathbf{y}})}{\|T^{\mu^*} w_{\mathbf{y}}\|_X^2}, \quad 1 \leq q \leq Q \right\},$$

the lower bound (10) can be expressed as the solution of the following *linear programming* problem:

$$\beta_{\mu^*}^{SLB}(\mu) = \inf_{\mathbf{y} \in \mathcal{Y}_*} J^{obj}(\mathbf{y}; \mu), \quad (12)$$

i.e. as the minimum value of the Rayleigh quotient (over the affinely decomposed Rayleigh quotients).

The goal is to build a sequence of suitable relaxed problems of the original LP problem (12) by seeking the minimum of the objective on a descending sequence of larger sets, built by adding successively linear constraints. In order to define this sequence, let us consider the following steps:

- (1) *Bounding box construction.* In order to guarantee *a priori* that all relaxations which will be considered are well-posed, we construct once for all a (continuity) bounding box given by

$$B_* = \prod_{q=1}^Q \left[-\frac{\gamma_q}{\beta(\mu^*)}, \frac{\gamma_q}{\beta(\mu^*)} \right],$$

being $\beta(\mu^*)$ the solution of the eigenproblem (8) computed for $\mu = \mu^*$ (equivalently given by (9)) and γ_q the continuity factor (μ^* -independent) of the bilinear form $a^q(\cdot, \cdot)$, given by

$$\gamma_q = \sup_{v \in X} \sup_{w \in X} \frac{a^q(w, v)}{\|v\|_X \|w\|_X}, \quad 1 \leq q \leq Q.$$

- (2) *Relaxed LP problem.* Given a properly selected constraints sample (or SCM sample) associated to μ^*

$$\mathcal{C}_K^* = \{\mu_1^*, \dots, \mu_K^*\},$$

compute the (surrogate) lower bounds $\beta_{\mu^*}^{SLB}(\mu')$ defined by (10), for each $\mu' \in \mathcal{C}_K^*$; then, define the relaxation set

$$\mathcal{Y}_*^{\text{LB}}(\mathcal{C}_K^*) = \left\{ \mathbf{y} \in \mathbb{R}^Q : \mathbf{y} \in B_{\mu^*} \quad \left| \sum_{q=1}^Q \Theta^q(\mu') y_q \geq \beta_{\mu^*}^{SLB}(\mu'), \quad \forall \mu' \in \mathcal{C}_K^* \right. \right\}$$

by selecting a set of additional linear constraints associated to \mathcal{C}_K^* . It is fundamental to observe that since $\mathcal{Y}_* \subset \mathcal{Y}_*^{\text{LB}}(\mathcal{C}_K^*)$ – for the proof, see [16] – the solution of the following relaxed problem,

$$\beta_{\mu^*}^{\text{LB}}(\mu) \equiv \beta_{\mu^*}^{\text{LB}}(\mu; \mathcal{C}_K^*) = \inf_{\mathbf{y} \in \mathcal{Y}_*^{\text{LB}}(\mathcal{C}_K^*)} J^{obj}(\mathbf{y}; \mu), \quad \forall \mu \in \mathcal{D}_{\mu^*} \quad (13)$$

gives the desired *local lower bound*. In fact, we have that

$$\beta_{\mu^*}^{SLB}(\mu) \geq \beta_{\mu^*}^{\text{LB}}(\mu),$$

being the minimum taken over a larger set; we omit the specification of the set \mathcal{C}_K^* for the sake of simplicity where no ambiguity occurs. We remark that problem (13) has to be solved for each $\mu \in \Xi_{train}$.

- (3) *Selection of the successive constraint.* The last step deals with the selection of the set \mathcal{C}_K^* , which is performed by means of a *greedy* procedure. In order to measure the quality of the lower bounds, we need to introduce an upper bound, defined as follows:

$$\beta_{\mu^*}^{\text{UB}}(\mu) \equiv \beta_{\mu^*}^{\text{UB}}(\mu; \mathcal{C}_K^*) = \inf_{\mathbf{y} \in \mathcal{Y}_*^{\text{UB}}(\mathcal{C}_K^*)} J^{obj}(\mathbf{y}; \mu), \quad \forall \mu \in \mathcal{D}_{\mu^*}, \quad (14)$$

being $\mathcal{Y}_*^{\text{UB}}(\mathcal{C}_K^*)$ the set given by

$$\mathcal{Y}_*^{\text{UB}}(\mathcal{C}_K^*) = \left\{ \tilde{\mathbf{y}} \in \mathbb{R}^Q : \tilde{\mathbf{y}} = \arg \min_{\mathbf{y} \in \mathcal{Y}_*} J^{obj}(\mathbf{y}; \mu'), \quad \forall \mu' \in \mathcal{C}_K^* \right\}.$$

Being $\mathcal{Y}_*^{\text{UB}}(\mathcal{C}_K^*) \subset \mathcal{Y}_*$ – see [19] for the proof – (14) is in fact an upper bound for $\beta_{\mu^*}^{\text{SLB}}(\mu)$, i.e.

$$\beta_{\mu^*}^{\text{SLB}}(\mu) \leq \beta_{\mu^*}^{\text{UB}}(\mu);$$

observe that (14) is just an enumeration problem. Finally, we can show how to add the *successive constraint*, by means of a *(local) greedy procedure*. Starting from an arbitrarily chosen $\mathcal{C}_1^* = \{\mu_1^*\}$, at step k we enrich the set $\mathcal{C}_k^* = \{\mu_1^*, \dots, \mu_k^*\}$, by means of the value μ_{k+1}^* given by

$$\mu_{k+1}^* = \arg \max_{\mu \in \Xi_{train}} \rho(\mu; \mathcal{C}_k^*) \equiv \frac{\beta_{\mu^*}^{\text{UB}}(\mu; \mathcal{C}_k^*) - \beta_{\mu^*}^{\text{LB}}(\mu; \mathcal{C}_k^*)}{\beta_{\mu^*}^{\text{UB}}(\mu; \mathcal{C}_k^*)};$$

i.e. choosing the element corresponding to the largest ratio $\rho(\mu; \mathcal{C}_k^*)$ over Ξ_{train} . The stopping criterium for this *successive* enrichment is given by

$$\rho(\mu; \mathcal{C}_K^*) \leq \varepsilon_*, \quad (15)$$

i.e. the procedure for the local lower bound finishes when the largest ratio is under a chosen SCM (local) tolerance $\varepsilon_* \in (0, 1)$. At the end of this procedure, we end up with K_{max} constraints, corresponding to the set $\mathcal{C}_{K_{max}}^* = \{\mu_1^*, \dots, \mu_{K_{max}}^*\}$.

Computation of a global lower bound

We now need to translate the local lower bound $\beta_{\mu^*}^{\text{LB}}(\mu)$, computed upon a selected value μ^* , to a global lower bound. We shall make a distinction between the iterative procedure by which we “cover” the parameter space \mathcal{D} and the relationship between the local and the global lower bounds.

Let us start from this second point; the output of the coverage procedure are the set $\mathcal{S} = \{\mu^{1*}, \dots, \mu^{S*}\}$ and the associated SCM samples

$$\mathcal{C}^{s*} = \{\mu_1^{s*}, \dots, \mu_{K(s)}^{s*}\}, \quad s = 1, \dots, S,$$

where $K(s)$ is the number of constraints points related to each $\mu^{s*} \in \mathcal{S}$. The global lower bound for $\beta(\mu)$ can be defined (see [16] for the proof) as

$$\beta^{\text{LB}}(\mu) = \beta(\mu^{\sigma*}) \beta_{\mu^{\sigma*}}^{\text{LB}}(\mu; \mathcal{C}^{\sigma*}) \quad (16)$$

being

$$\sigma(\mu) = \arg \max_{s \in \{1, \dots, S\}} \beta(\mu^{s*}) \beta_{\mu^{s*}}^{\text{LB}}(\mu; \mathcal{C}^{s*}).$$

In practice, for each μ the global lower bound is given by the maximum among the products between the stability factors $\beta(\mu^{s*})$ and the local lower bounds $\beta_{\mu^{s*}}^{\text{LB}}(\mu; \mathcal{C}^{s*})$, corresponding to the selected $\{\mu^{1*}, \dots, \mu^{S*}\}$. We remark that the global lower bound $\beta^{\text{LB}}(\mu)$ given by this method interpolates $\beta(\mu)$ at each $\mu^* \in \mathcal{S}$, being $\beta^{\text{LB}}(\mu^*) = \beta(\mu^*)$ in these cases.

We now discuss the procedure by which we select the set $\mathcal{S} = \{\mu^{1*}, \dots, \mu^{S*}\}$ and the associated SCM samples; also in this case, we use a (*global*) *greedy procedure*, which encapsulates the local ones used for the construction of each SCM sample. Starting from a chosen μ^{1*} , we set $\mathcal{S} = \{\mu^{1*}\}$ and initialize the corresponding SCM sample $\mathcal{C}^{1*} = \{\mu^{1*}\}$, being $\mu_1^{1*} = \mu^{1*}$. At step j , we have

$$\mathcal{S}^{(j)} = \{\mu^{1*}, \dots, \mu^{(j-1)*}\}, \quad \mathcal{C}^{s*} = \{\mu_1^{s*}, \dots, \mu_{K(s)}^{s*}\}, \quad s = 1, \dots, j-1,$$

the new μ^{j*} is selected as

$$\mu^{j*} = \arg \min_{\mu \in \Xi_{\text{train}}} \beta_{\mu^{(j-1)*}}^{\text{LB}}(\mu; \mathcal{C}^{(j-1)*})$$

i.e. by taking the minimum over Ξ_{train} of the local lower bound computed w.r.t. the previous $\mu^{(j-1)*}$. Then, we build the *covered set*

$$\mathcal{R}_j = \left\{ \mu \in \Xi_{\text{train}} \mid \beta_{\mu^{j*}}^{\text{LB}}(\mu; \mathcal{C}_1^{j*}) > 0 \right\}$$

and start the procedure for the construction of the local lower bound (upon μ^{j*}): for $k = 1, \dots, K(j)$, we build iteratively the sets \mathcal{C}_k^* , $k = 1, \dots, K(j)$ and compute the *actual covered set*

$$\mathcal{R}_j^{\text{act}} = \left\{ \mu \in \Xi_{\text{train}} \mid \beta_{\mu^{j*}}^{\text{LB}}(\mu; \mathcal{C}_k^{j*}) > 0 \right\};$$

this (local) procedure finishes when $\mathcal{R}_j^{\text{act}} \setminus \mathcal{R}_j = \emptyset$, i.e. the current μ^{j*} does not give the possibility to increase the coverage, and the stopping criterium (15) is fulfilled. At this point, we put $\mathcal{R}_j^* = \mathcal{R}_j^{\text{act}}$ and stock the (local) covered set, by putting

$$\Xi_{\text{train}} := \Xi_{\text{train}} \setminus \mathcal{R}_j^*.$$

The global procedure ends up when all the train sample has been covered, i.e. when $\Xi_{\text{train}} = \emptyset$.

APPENDIX B. DESCRIPTION OF THE EMPIRICAL INTERPOLATION METHOD

The empirical interpolation method (EIM) is a model reduction scheme that recovers the assumption of affine parametric dependence in nonaffinely parametrized operators (e.g. linear, bilinear forms, etc.). In the case of a nonaffinely parametrized bilinear form $a(v, w; \mu)$, the latter is replaced by an affinely parametrized approximation of the form

$$a(v, w; \mu) = \sum_{q=1}^Q \Theta^q(\mu) a_{\text{EIM}}^q(v, w) + \varepsilon_{\text{EIM}}(v, w; \mu), \quad (17)$$

where the error term ε_{EIM} needs to be controlled to an acceptable tolerance. The approximation is obtained by direct application of the EIM to the (nonaffinely) parametrized functions or tensors which appear in the original operators.

We provide a short presentation of the EIM procedure based on [2]. Denote with $g(x, \mu) \in C^0(\mathcal{D}; L^\infty(\Omega))$ a scalar function depending on both the spatial coordinates x and the parameters vector μ in a nonaffine way; the extension to tensors through an element-wise procedure is straightforward. The goal is to find an approximate expansion under the form

$$g_M(x, \mu) = \sum_{j=1}^M \Theta_j(\mu) \zeta_j(x). \quad (18)$$

where $\Theta_j(\mu)$, $j = 1, \dots, M$ are M parameter-dependent functions and $\zeta_j(x)$, $j = 1, \dots, M$ are M parameter-independent functions, denoted also *shape functions*.

Being an interpolation procedure, the EIM procedure seeks a sequence of (nested) sets of interpolation points $T_M = \{p_1, \dots, p_M\}$, with $p_j \in \Omega$ for each $j = 1, \dots, M$, and a set of shape functions $\zeta_j(x)$, in order to compute the expansion (18) by solving the following Lagrange interpolation problem:

$$\sum_{j=1}^M \mathbb{B}_{i,j}^M \Theta_j(\mu) = g(t_i, \mu), \quad \forall i = 1, \dots, M;$$

the interpolation matrix $\mathbb{B}^M \in \mathbb{R}^{M \times M}$ is defined as

$$(\mathbb{B}^M)_{ij} := \zeta_j(t_i), \quad \forall i, j = 1, \dots, M.$$

Let us denote $\Xi_{train} \subset \mathcal{D}$ a large training set, M_{max} the maximum number of terms, ε_{EIM}^* a fixed tolerance and select an initial parameter value μ_1 . The EIM procedure (as defined in [2]) is as follows.

(1) *Case $M = 1$:* first set

$$\zeta_1(x) := g(x, \mu_1), \quad p_1 := \arg \operatorname{ess\,sup}_{x \in \Omega} |\zeta_1(x)|, \quad q_1 = \zeta_1(x)/\zeta_1(p_1);$$

moreover, define the space $G_1 := \text{span}(\zeta_1)$ and set $\mathbb{B}_{11}^1 = 1$.

(2) *Case $M = 2, \dots, M_{max}$:* solve the linear programming problem

$$\mu_M := \arg \max_{\mu \in \Xi_{train}} \inf_{v \in G_{M-1}} \|g(\cdot, \mu) - v\|_{L^\infty(\Omega)}$$

and set

$$\zeta_M(x) := g(x, \mu_M), \quad G_M := \text{span}(\zeta_1, \dots, \zeta_M).$$

Then, solve the linear system

$$\sum_{j=1}^{M-1} \sigma_j^{M-1} q_j(t_i) = \xi_M(t_i), \quad i = 1, \dots, M-1,$$

compute the residual $r_M(x)$ and set the next interpolation point as the maximizer of the residual:

$$r_M(x) := \zeta_M(x) - \sum_{j=1}^{M-1} \sigma_j^{M-1} \zeta_j(x), \quad p_M := \arg \operatorname{ess\,sup}_{x \in \Omega} |r_M(x)|.$$

Set $q_M(x) = r_M(x)/r_M(p_M)$, $\mathbb{B}_{ij}^M = q_j(t_i)$, $i, j = 1, \dots, M$ and solve the interpolation problem

$$\sum_{j=1}^{M-1} \mathbb{B}_{ij}^M \Theta_j^M = g(t_i, \mu), \quad \forall i = 1, \dots, M-1.$$

(3) *Stopping criterium:* the EIM procedure finishes when

$$\max_{\mu \in \Xi_{train}} \inf_{v \in G_M} \|g(\cdot, \mu) - v\|_{L^\infty(\Omega)} < \varepsilon_{EIM}^*.$$

Given an approximation $g_M(x, \mu)$, $M < M_{max}$, we denote the *one point (OP) error estimator* the following quantity (very inexpensive to compute):

$$\hat{\epsilon}_M(\mu) = |g(t_{M+1}; \mu) - g_M(t_{M+1}; \mu)|, \quad (19)$$

corresponding to the difference between the function and the interpolant at the point t_{M+1} , which gives the largest residual $r_M(x)$. While not rigorous as a posteriori error bound, this quantity proves to be an intuitive measure of the error committed by the EIM procedure [2]. Advances in error bounds developments have been presented in [6, 14, 23, 28].

REFERENCES

- [1] I. Babuška and S.A. Sauter. Is the pollution effect of the FEM avoidable for Helmholtz equation considering high wave numbers? *SIAM Review*, 42(3):451–84, 2000.
- [2] M. Barrault, Y. Maday, N.C. Nguyen, and A.T. Patera. An ‘empirical interpolation’ method: application to efficient reduced-basis discretization of partial differential equations. *C. R. Acad. Sci. Paris. Sér. I Math.*, 339(9):667–672, 2004.
- [3] S.C. Brenner and L.R. Scott. *The mathematical theory of finite element methods (2nd Ed)*. Springer, 2002.
- [4] F. Brezzi and M. Fortin. *Mixed and Hybrid Finite Element Methods*, volume 15 of *Springer Series in Computational Mathematics*. Springer Verlag, 1991.
- [5] Y. Chen, J. Hesthaven, Y. Maday, and J. Rodriguez. A monotonic evaluation of lower bounds for inf-sup stability constants in the frame of reduced basis approximations. *C. R. Acad. Sci. Paris. Sér. I Math.*, 346:1295–1300, 2008.
- [6] J.L. Eftang, M.A. Grepl, and A.T. Patera. A posteriori error bounds for the empirical interpolation method. *C. R. Acad. Sci. Paris. Sér. I Math.*, 348(9–10):575–579, 2010.
- [7] J.L. Eftang, P. Huynh, D.J. Knezevic, and A.T. Patera. A two-step certified reduced basis method. *J. Sci. Comp.* (*submitted*), 2010.
- [8] J.L. Eftang, D.J. Knezevic, and A.T. Patera. An “hp” certified reduced basis method for parametrized parabolic partial differential equations. *Math. Comp. Model. Dyn.*, 17(4):395–422, 2011.
- [9] J.L. Eftang, A.T. Patera, and E.M. Rønquist. An “hp” certified reduced basis method for parametrized elliptic partial differential equations. *SIAM J. Sci. Comput.*, 32(6):3170–3200, 2010.
- [10] A. Ern and J.-L. Guermond. *Theory and practice of finite elements*. Springer-Verlag New York, 2004.
- [11] L. C. Evans. *Partial Differential Equations*. American Math Society, 1998.
- [12] A.L. Gerner and K. Veroy. Reduced basis a posteriori error bounds for the stokes equations in parametrized domains: a penalty approach. *Math. Mod. and Meth. in Appl. Sc.*, *in press*, 2010.
- [13] D. Green and W.G. Unruh. The failure of the Tacoma bridge: a physical model. *Am. J. Phys.*, 74(8):706–716, 2006.
- [14] M.A. Grepl, Y. Maday, N.C. Nguyen, and A.T. Patera. Efficient reduced-basis treatment of nonaffine and nonlinear partial differential equations. *ESAIM Math. Modelling Numer. Anal.*, 41(3):575–605, 2007.
- [15] A. Holt and M. Landahl. *Aerodynamics of wings and bodies*. Dover New York, 1985.
- [16] D.B.P. Huynh, D. Knezevic, Y. Chen, J. Hesthaven, and A.T. Patera. A natural-norm successive constraint method for inf-sup lower bounds. *Comput. Methods Appl. Mech. Engrg.*, 199(29–32), 2010.
- [17] D.B.P. Huynh, N.C. Nguyen, A.T. Patera, and G. Rozza. Rapid reliable solution of the parametrized partial differential equations of continuum mechanics and transport. <http://augustine.mit.edu>.
- [18] D.B.P. Huynh and G. Rozza. Reduced basis method and a posteriori error estimation: application to linear elasticity problems. *Submitted*, 2011.
- [19] D.B.P. Huynh, G. Rozza, S. Sen, and A.T. Patera. A successive constraint linear optimization method for lower bounds of parametric coercivity and inf-sup stability costants. *C. R. Acad. Sci. Paris. Sér. I Math.*, 345:473–478, 2007.
- [20] T. Lassila, A. Quarteroni, and G. Rozza. A reduced-basis model with parametric coupling for fluid-structure interaction problems. *MOX-Report No. 02/2011*, 2011.
- [21] T. Lassila and G. Rozza. Parametric free-form shape design with PDE models and reduced basis method. *Comput. Methods Appl. Mech. Engrg.*, 199(23–24):1583–1592, 2010.
- [22] T. Lassila and G. Rozza. Model reduction of semiaffinely parametrized partial differential equations by two-level affine approximation. *C.R. Math. Acad. Sci. Paris, Series I*, 349(1–2):61–66, 2011.
- [23] Y. Maday, N.C. Nguyen, A.T. Patera, and G.S.H. Pau. A general multipurpose interpolation procedure: the magic points. *Commun. Pure Appl. Anal.*, 8(1), 2009.
- [24] A. Manzoni, A. Quarteroni, and G. Rozza. Model reduction techniques for fast blood flow simulation in parametrized geometries. *To appear in Int. J. Numer. Meth. Biomed. Engng.*, 2011. Online version available at: <http://cmcs.epfl.ch/people/manzoni>.

- [25] A. Manzoni, A. Quarteroni, and G. Rozza. Shape optimization of cardiovascular geometries by reduced basis methods and free-form deformation techniques. *Submitted*, 2011. Online version available at: <http://cmcs.epfl.ch/people/manzoni>.
- [26] L.M. Milne-Thomson. *Theoretical aerodynamics*. Dover, 1973.
- [27] B. Mohammadi and O. Pironneau. *Applied shape optimization for fluids*. Oxford University Press, 2001.
- [28] N.C. Nguyen. A posteriori error estimation and basis adaptivity for reduced-basis approximation of nonaffine-parametrized linear elliptic partial differential equations. *J. Comp. Phys.*, 227:983–1006, 2007.
- [29] N.C. Nguyen, G. Rozza, and A.T. Patera. Reduced basis approximation and a posteriori error estimation for the time-dependent viscous Burgers equation. *Calcolo*, 46(3):157–185, 2009.
- [30] A.T. Patera and G. Rozza. *Reduced Basis Approximation and A Posteriori Error Estimation for Parametrized Partial Differential Equation*. Version 1.0, Copyright MIT 2006, to appear in (tentative rubric) MIT Pappalardo Graduate Monographs in Mechanical Engineering, 2009.
- [31] C. Prud'homme, D.V. Rovas, K. Veroy, and A.T. Patera. A mathematical and computational framework for reliable real-time solution of parametrized partial differential equations. *ESAIM Math. Modelling Numer. Anal.*, 36(5):747–771, 2002.
- [32] A. Quarteroni, G. Rozza, and A. Manzoni. Certified reduced basis approximation for parametrized partial differential equations in industrial applications. *J. Math. Ind.*, 1(3), 2011.
- [33] G. Rozza. Reduced basis approximation and error bounds for potential flows in parametrized geometries. *Commun. Comput. Phys.*, 9:1–48, 2011.
- [34] G. Rozza, D.B.P. Huynh, and A. Manzoni. Reduced basis approximation and a posteriori error estimation for Stokes flows in parametrized geometries: roles of the inf-sup stability constants. Technical Report 22.2010, MATHICSE, 2010. Online version available at: <http://cmcs.epfl.ch/people/manzoni>.
- [35] G. Rozza, D.B.P. Huynh, and A.T. Patera. Reduced basis approximation and a posteriori error estimation for affinely parametrized elliptic coercive partial differential equations. *Arch. Comput. Methods Engrg.*, 15:229–275, 2008.
- [36] G. Rozza, T. Lassila, and A. Manzoni. Reduced basis approximation for shape optimization in thermal flows with a parametrized polynomial geometric map. In *Spectral and High Order Methods for Partial Differential Equations. Selected papers from the ICOSAHOM '09 conference, June 22–26, Trondheim, Norway*, pages 307–315. Springer, Series: Lecture Notes in Computational Science and Engineering, vol. 76, J.S. Hesthaven, E.M. Rønquist (Eds.), 2011.
- [37] S. Sen, K. Veroy, P. Huynh, S. Deparis, N.C. Nguyen, and A.T. Patera. “Natural norm” a posteriori error estimators for reduced basis approximations. *J. Comp. Phys.*, 217(1):37–62, 2006.
- [38] J. Xu and L. Zikatanov. Some observation on Babuška and Brezzi theories. *Numer. Math.*, 94(1):195–202, 2003.

Recent publications :

MATHEMATICS INSTITUTE OF COMPUTATIONAL SCIENCE AND ENGINEERING
Section of Mathematics
Ecole Polytechnique Fédérale
CH-1015 Lausanne

- 17.2010** A. C. I. MALOSSI, P. J BLANCO, S. DEPARIS, A. QUARTERONI:
Algorithms for the partitioned solution of weakly coupled fluid models for cardiovascular flows
- 18.2010** M. DISCACCIATI, A. QUARTERONI, S. QUINODOZ:
Numerical approximation of internal discontinuity interface problems
- 19.2010** B. KALTENBACHER, M. KALTENBACHER, I. SIM:
Perfectly matched layer technique for the second order wave equations in time domain
- 20.2010** T. LASSILA, G. ROZZA:
Model reduction of semiaffinely parameterized partial differential equations by two-level affine approximation
- 21.2010** T. HOFER, J. RAPPAZ:
Numerical conservation schemes for convection-diffusion equations
- 22.2010** G. ROZZA, D.B. PHUONG HUYNH, A. MANZONI:
Reduced basis approximation and a posteriori error estimation for Stokes flows in parametrized geometries : roles of the inf-sup stability constants
- 01.2011** T. LASSILA, A. QUARTERONI, G. ROZZA:
A reduced basis model with parametric coupling for fluid-structure interaction problems
- 02.2011** A. QUARTERONI, G. ROZZA, A. MANZONI:
Certified Reduced Basis Approximation for Parametrized Partial Differential Equations and Applications.
- 03.2011** M. LOMBARDI, N. PAROLINI, A. QUARTERONI, G. ROZZA:
Numerical simulation of sailing boats: dynamics, FSI and shape optimization.
- 04.2011** P. BLANCO, P. GERVASIO, A. QUARTERONI:
Extendet variational formulation for heterogeneous partial differential equations.
- 05.2011** A. MANZONI, A. QUARTERONI, G. ROZZA:
Model reduction techniques for fast blood flow simulation in parametrized geometries.
- 06.2011** M. ASTORINO, J. BECERRA SAGREDO, A. QUARTERONI:
A modular lattice Boltzmann solver for GPU computing processors.
- 07.2011** L. IAPICHINO, A. QUARTERONI, G. ROZZA:
A reduced basis hybrid method for the coupling of parametrized domains represented by fluidic networks.
- 08.2011** T. LASSILA, A. MANZONI, G. ROZZA:
On the approximation of stability factors for general parametrized partial differential equations with a tow-level affine decomposition.